

Temperature Calibrator LR-Cal PYROS-BB

- with Black Body, to **Calibrate Infrared Thermometer**.
Range: +24°C...+600°C (at +20°C ambient temperature)
- Incl. precision reference probe (Pt 100 4-wire, class A) and digital handheld indicator
- for 230 VAC und 115 VAC (switchable), digital thermometer battery operated
- For mobile and stationary usage




PYROS-BB

Typical Application:

- Check and calibration of (non-contacting) Infrared Thermoeter


The power supply is switchable 230 / 115 VAC. This makes this unit useable all over the world.

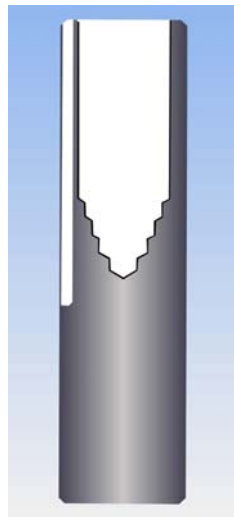

Included in standard supply:

- Dry block temperature calibrator type **LR-Cal PYROS-650** (see datasheet "PYROS").
- Special insert with Black Body, painted with black graphity paint
Outer diameter of this insert: 25,5 mm,
Depth 150 mm.
Inner depth (Black Body): 70 mm (gestuft).
Order-Code **BB-INSERT-01-PYROS**
Incl. hole 3.2 mm diam. for reference probe.
- Reference probe Pt 100 (4-wire, class A), outer diameter 3 mm.
- Digital handheld thermometer type **C100** (see datasheet "C100/C110/C120").
- Operating manual for **LR-Cal PYROS-650** and digital handheld thermometer **C100**.

OPTIONAL: certificate of calibration

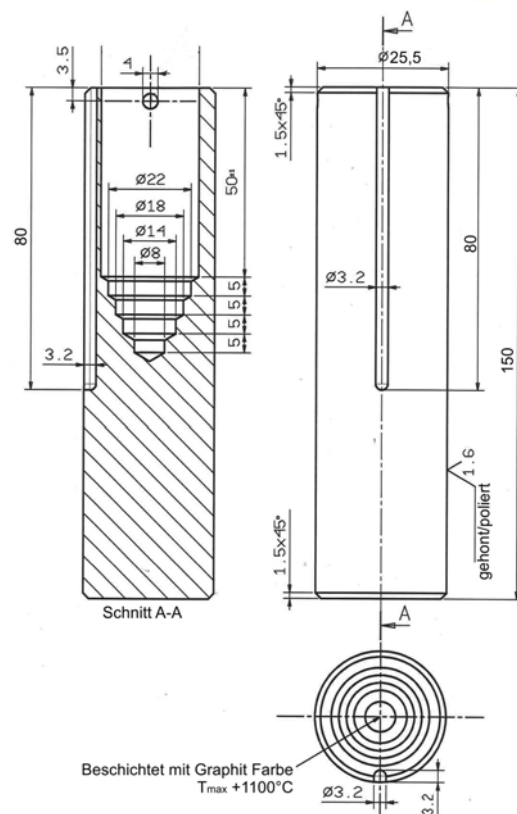

DRUCK & TEMPERATUR Leitenberger GmbH

Bahnhofstr. 33 • D-72138 Kirchentellinsfurt • Germany

Tel.: +49 -71 21 - 9 09 20 - 0 • Fax: +49 - 71 21 - 9 09 20 - 99

E-Mail: DT-Export@Leitenberger.de • <http://www.druck-temperatur.de>



